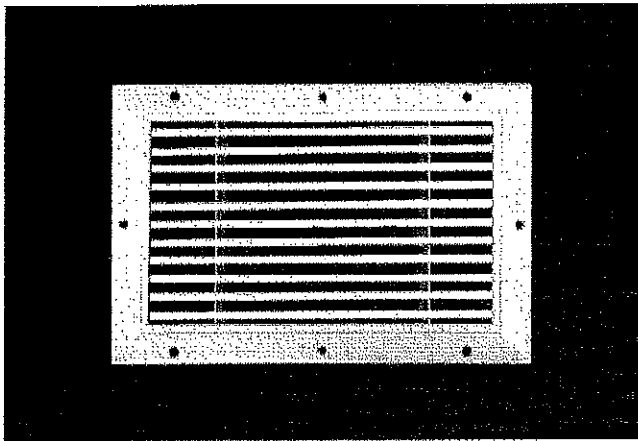





EXHIBIT D

DRG **Dayus Register & Grille** SUBMITTAL DRAWING**Bar Linear J-Bead Flange Grille****DABLJ**

- Fully extruded aluminum construction for a stylish built in look
- J-Bead recessed flange frame must be taped & plastered over
- Improved design allows for true flangeless look and easier installation
- Fixed blades designed for long straight air throw
- Sections longer than 84" are joined together for continuous appearance with the aligning pins provided
- Available on 1/2" increments as standard
- Custom sizes available, Extra charge may apply
- Durable powder coat painted finish
- Available in White, Silver, Brown, Mill or Black
- Plaster finishing is the responsibility of the installer

Not suitable for floor use**HOW TO ORDER**
DABLJ - 00 - TB 30 x 4 COLOR

Blade	Mounting	Length & Height	White, Silver Brown, Mill or Black
-00, -01, -15	A or TB		
-30, -82, -84			

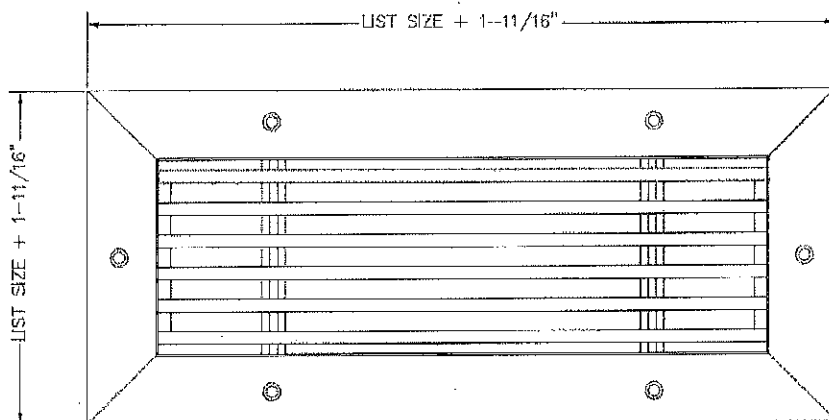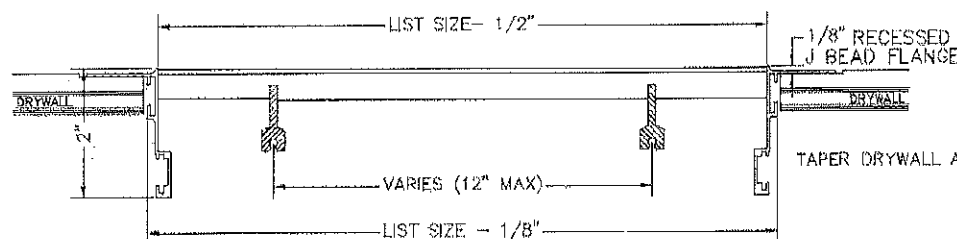**NEW**

• Invisible lip design allows for a true frameless look and easier installation



MODEL	DABLJ
FACE BLADES	Horizontal Fixed
REAR BLADES	n/a
DAMPER	n/a
MATERIAL	Aluminum
COLOR	White/Silver/Mill Brown/Black

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

Phone: (519) 737-1199 Fax: (519) 737-1831
Email: mail@dayus.com Web: www.dayus.com



Page S109

Dayus Register & Grille
5290 Pulleyblank St., RR#1 • Windsor, Ontario • N9A 6J3


ver. 06/17

DRG Dayus Register & Grille SUBMITTAL DRAWING

Bar Linear Blade Options


-00-

0° 13/64" blades on 1/2" centers

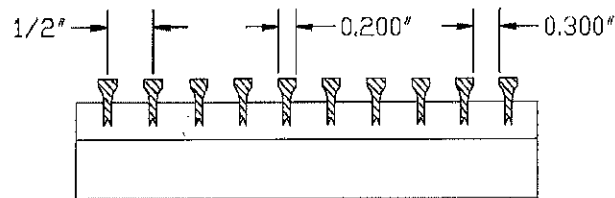


-01-

0° 1/4" blades on 1/2" centers

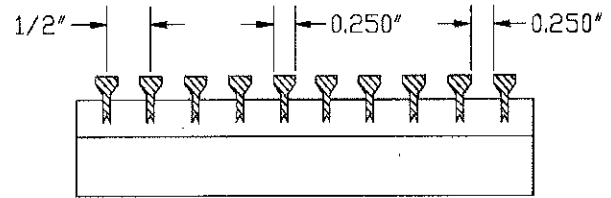


-15-

15° 13/64" blades on 1/2" centers

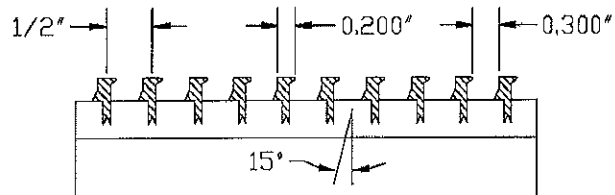


-30-

30° 13/64" blades on 1/2" centers

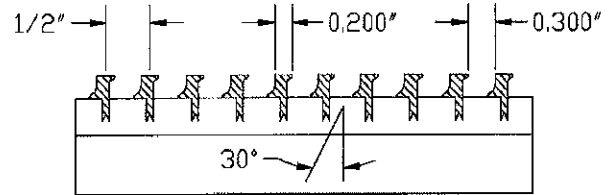


-82-

0° 1/8" blades on 1/2" centers

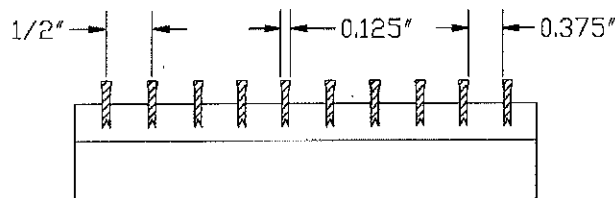

-84-

0° 1/8" blades on 1/4" centers

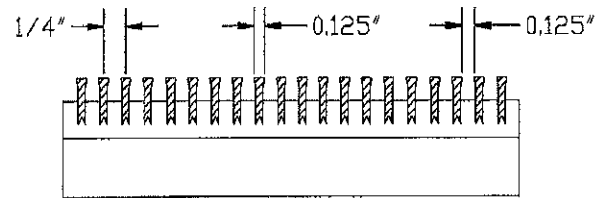

- Additional charges apply for the -84 core option


DRG Dayus Register & Grille SUBMITTAL DRAWING

Bar Linear Mounting Options

-A

SCREWS


Color matched screws with countersunk screw holes.
Suitable for ceiling, wall or sill installation.

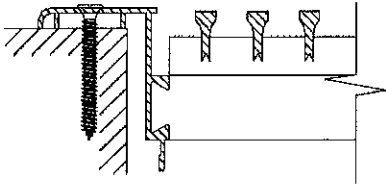

-B

SPRING CLIPS


Clips behind the flange keep grille snug in opening and are not visible from the face.
Only for floor and sill applications.
NOT suitable for wall or ceiling use.

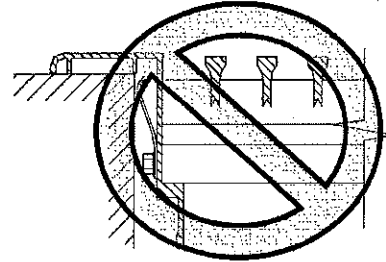

-C

CONCEALED BRACKETS


Grille gets fastened to duct-mounted brackets that are concealed behind the blades.
Suitable for ceiling, wall or sill installation.



-D

SIDEWALL SCREW HOLES

Screw holes drilled at 45° on inner flange.
Only available with **-R Removable core**.
(Removable option not available for floor)
Suitable for ceiling, wall or sill installation.



These mounting options
are not available
with the J-bead frame

-TB

NO MOUNTING OPTION

For custom applications.

